




Y7S423D033


EDITION 01 DATE 20170119

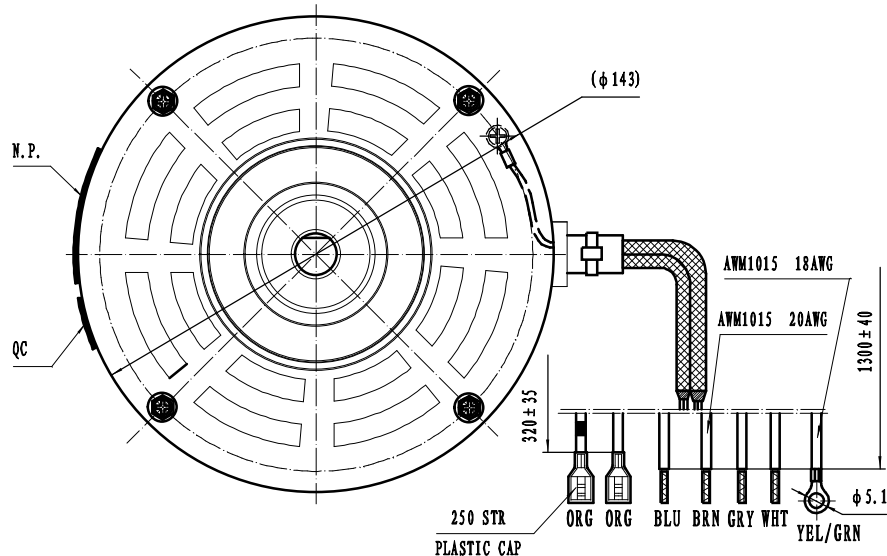

UNITS: mm

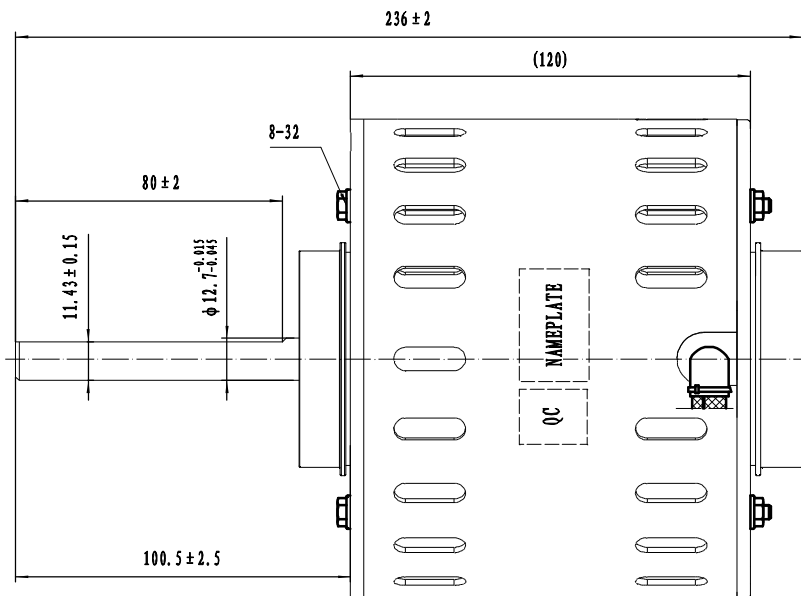

CONNECT DIAGRAM

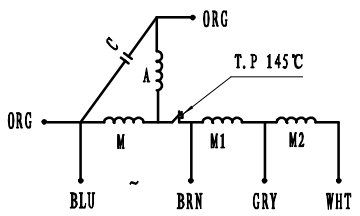

Y7S423D033 (TBR4A031RSM)
 240V 50Hz AMP2.6 4P PHI CL: B
 315W RPM1350/3SPD CAP: 4 μ F/440VAC
 THERMALLY-PROTECTED ROT
 WWW.TECHTOP.COM.AU

WIRE DIAGRAM

TECHNIC REQUIREMENT

1. MOTOR RUNS WELL.
2. 240V 50Hz 4 μ F/440V RPM1350 4P CL: B
3. ROTATION CCW
4. ENDPLAY: 0.3-2.0;
5. BALL BEARING (C&U OR WHRBC OR NZSB OR SXA AND SO ON)

						TBR4A031RSM			ZHONGSHAN BROAD-OCEAN MOTOR CO., LTD.	
NO.	MARK	ALTERATION	SIGN	DATE						
DESIGN	ZhiYun Li	STANDARDIZATION			PHASE	WEIGHT	SCALE			
DRAWING							1:1			
PROOFREAD		AUDITING			AGGREGATELY		NO.	OUTLINE		
TECHNICS		APPROVE								