


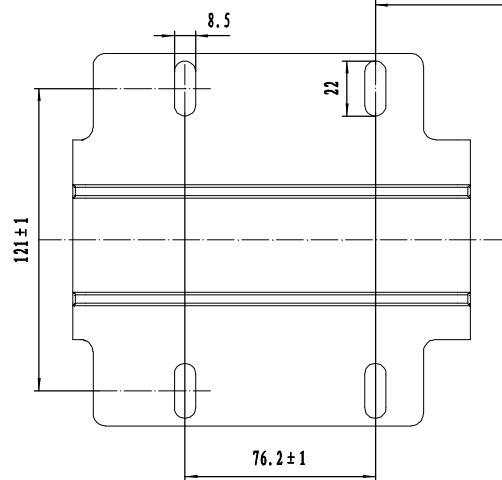


Y7S423F523


EDITION	A	DATE	20170119
---------	---	------	----------

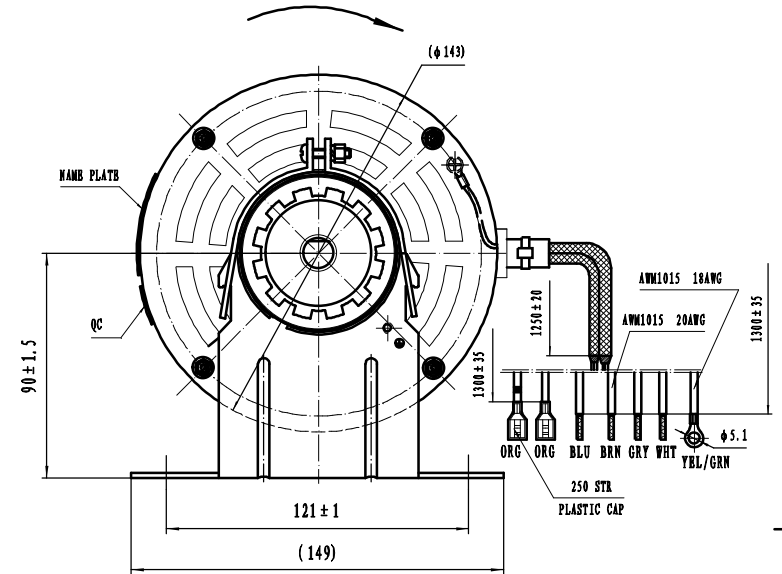


UNITS: mm

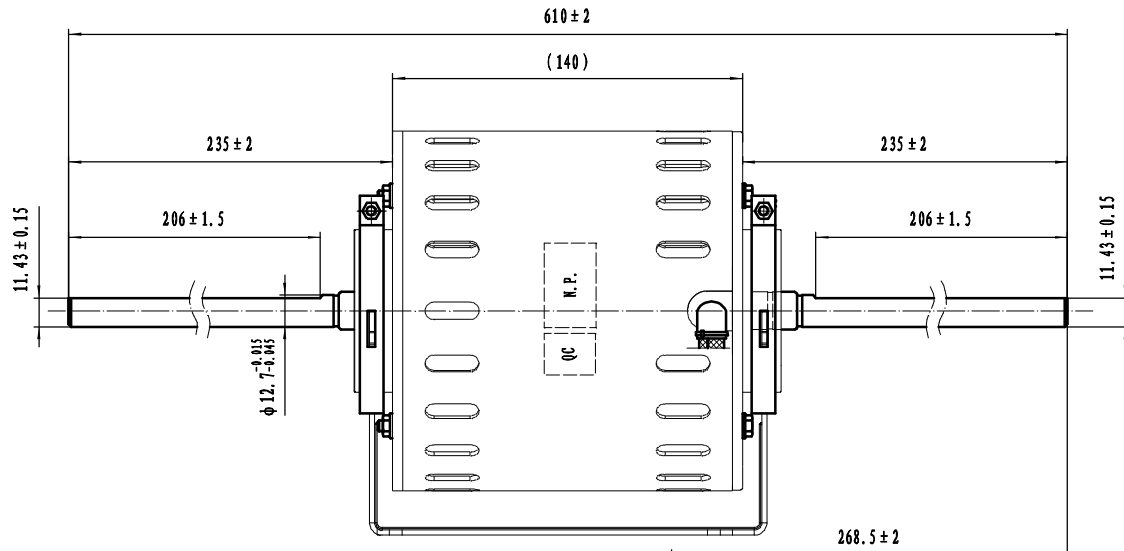

CONNECT DIAGRAM

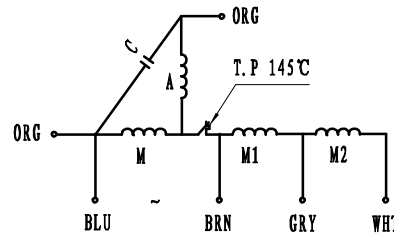

		Y7S423F523 (TBR4A075CDM)
		240V 50Hz AMP4.3 4P PHI CL: B
750W RPM1360/3SPD CAP: 20μF/440VAC		ROT
THERMALLY-PROTECTED		WWW.TECHTOP.COM.AU



TECHNIC REQUIREMENT

1. MOTOR RUNS WELL.
2. 240V 50Hz 20μF/440V RPM1360 4P CL: B
3. ROTATION CCW
4. ENDPLAY: 0.3-2.0;
5. BALL BEARING (C&U OR WHRBC OR NZSB OR SXA AND SO ON)

				TBR4A075CDM			ZHONGSHAN BROAD-OCEAN MOTOR CO., LTD.	
NO.	MARK	ALTERATION	SIGN	DATE	PHASE	WEIGHT	SCALE	OUTLINE
DESIGN	ZHIYUN LI	STANDARDIZATION					1:1	
DRAWING								
PROOFREAD		AUDITING						
TECHNICS		APPROVE			AGGRGATBLY	NO.		